



Aluminum

13

Al

26.98


Aluminum Handcuffs

ASP Chain, Hinge and Rigid Handcuffs set a new standard for police duty restraints. Their hardened stainless steel frame is lightweight, yet incredibly strong. Their polymer overmold has radiused edges and permanent color. The cuffs incorporate double sided keyways and replaceable Lock Sets. A high contact bow face allows positive application. The conical bow profile results in a cuff that fits the largest range of wrists in the industry.

ASP Aluminum Handcuffs improve on this revolutionary design. Alloy bows are hot forged to shape, profile trimmed and precision machined. Each bow is then hardcoat anodized with a matte black finish. Finally, the cuff is laser engraved with the date of manufacture and a unique serial number. The result is an incredibly lightweight, matte black handcuff that incorporates all of the advantages of traditional ASP restraints.



ASP Aluminum Handcuffs . . . the Lighter Side of Control

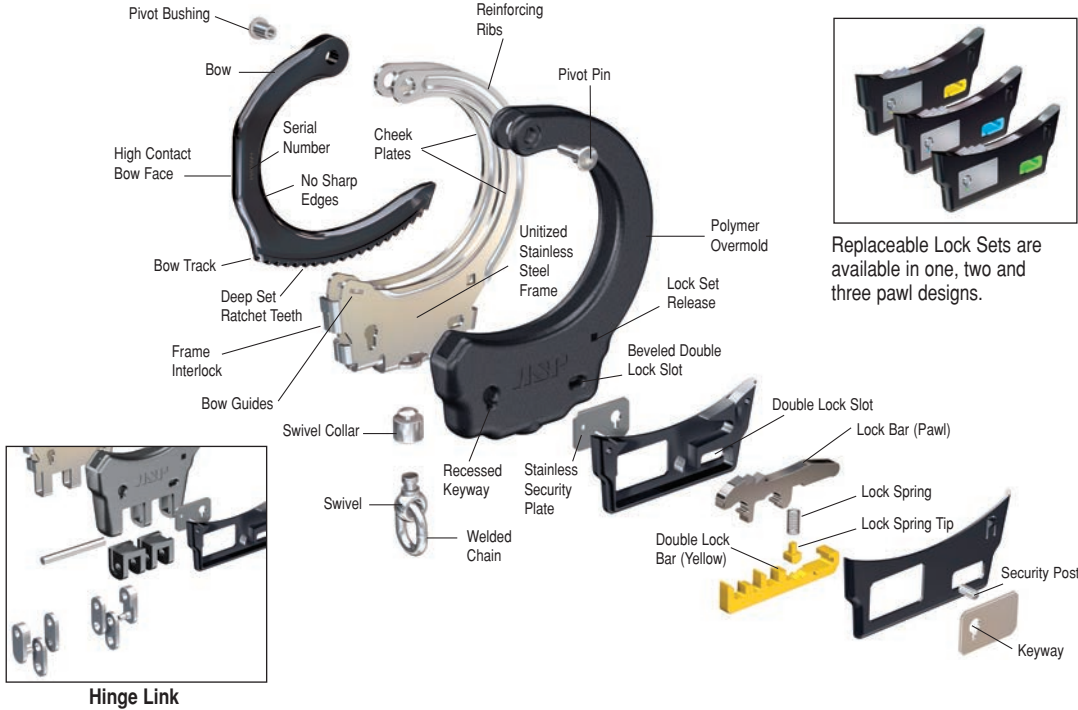

Replaceable Lock Sets are available in one, two and three pawl designs.



Chain cuffs are flexible and more easily applied during a confrontation. Hinge cuffs provide more restricted control of large subjects. Rigid cuffs provide added security during transport.



Hinge Link

Background

- Precision formed
- Stainless steel frame
- * Polymer overmold
- * High contact face
- No sharp edges
- * Permanent color options
- Extremely lightweight
- * Interchangeable Lock Set
- * Recessed keyway
- Two-sided double lock
- * Double lock indicator (colored)
- * Two-sided lock release
- * One-direction single and double lock release

(*) A Patent Pending exclusive ASP feature

Specifications

| Length | | |
|--------------|----------------------------|-----------|
| Chain | 9.4" | 239 mm |
| Hinge | 9.2" | 234 mm |
| Rigid | 9.2" | 234 mm |
| Width | 3.125" | 79 mm |
| Weight | | |
| Chain | 7 ounces | 198 grams |
| Hinge | 8.5 ounces | 241 grams |
| Rigid | 10.7 ounces | 303 grams |
| System | Replaceable Lock Set | |
| Construction | Overmolded stainless steel | |
| Edge Radius | .035" minimum (1 mm) | |

Frame

- Computer designed
- Flex Frame Technology
- Surgical stainless steel
- Precision die struck
- Reinforcing ribs
- Bow guides
- Interlocking cheek plates
- Unitized assembly
- Polymer overmold
- Permanent color

Chain Link

- Stainless steel
- Free rotating swivel
- Reinforcing swivel collar

Hinge Link

- Stainless steel
- Four point rotation

Rigid Link

- Stainless pivot bars (2)
- Two point rotation
- Dual extension locking
- Automatic rigidity

Lock Set

- Replaceable
- Dual keyways
- Stainless security block
- Stainless security posts
- Dual double lock slots
- Color coded double lock indicator
- Dual release lock bar (pawl)
 - One pawl (Yellow)
 - Two pawl (Blue*)
 - Three pawl (Green)
- Single spring double lock bar
- Hardened keyways

* Requires a Custom Key



Advanced Technology Cases are specifically designed for the ASP Tactical Handcuff Series of restraints.



Bow

- Conical geometry
- Integral frame track
- Deep set teeth
- High contact face
- Serial numbered
- Stainless pivot pin

Warranty

- Limited Lifetime



"Protecting Those Who Protect"